现货库存、技术资料、百科信息、热点资讯，精彩尽在鼎好！

BTA04 T/D/S/A
BTB04 T/D/S/A

SENSITIVE GATE TRIACS

FEATURES

- Very low I_{GT} = 10mA max
- Low I_H = 15mA max
- BTA Family:
  Insulating voltage = 2500$V_{(RMS)}$
  (UL recognized: E81734)

DESCRIPTION

The BTA/BTB04 T/D/S/A triac family are high performance glass passivated PNPN devices.
These parts are suitables for general purpose applications where gate high sensitivity is required. Application on 4Q such as phase control and static switching.





TO-220AB

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter			Value	Unit
$I_{T(RMS)}$	RMS on-state current (360° conduction angle)	BTA	Tc = 90°C	4	A
		BTB	Tc = 95°C		
I_{TSM}	Non repetitive surge peak on-state current (Tj initial = 25°C)		tp = 8.3ms	42	A
			tp = 10ms	40	
I^2t	I^2t value		tp = 10ms	8	A^2s
dI/dt	Critical rate of rise of on-state current Gate supply: I_G = 50mA dI_G/dt = 0.1A/µs		Repetitive F = 50Hz	10	A/µs
			Non repetitive	50	
Tstg Tj	Storage and operating junction temperature range			-40 to +150 -40 to +110	°C
Tl	Maximum lead soldering temperature during 10s at 4.5mm from case			260	°C

Symbol	Parameter	BTA / BTB04-			Unit
		400 T/D/S/A	600 T/D/S/A	700 T/D/S/A	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Tj = 110°C	400	600	700	V

THERMAL RESISTANCE

Symbol	Parameter		Value	Unit
Rth (j-a)	Junction to ambient		60	°C/W
Rth (j-c) DC	Junction to case for DC	BTA	4.4	°C/W
		BTB	3.2	
Rth (j-c) AC	Junction to case for 360° conduction angle (F = 50Hz)	BTA	3.3	°C/W
		BTB	2.4	

GATE CHARACTERISTICS (maximum values)

$P_{G(AV)}$ = 1W P_{GM} = 40W (tp = 20µs) I_{GM} = 4A (tp = 20µs) V_{GM} = 16V (tp = 20µs)

ELECTRICAL CHARACTERISTICS

Symbol	Test conditions		Quadrant		BTA / BTB04				Unit
					T	D	S	A	
I_{GT}	V_D = 12V (DC) R_L = 33Ω	Tj = 25°C	I - II - III	MAX.	5	5	10	10	mA
			IV	MAX.	5	10	10	25	
V_{GT}	V_D = 12V (DC) R_L = 33Ω	Tj = 25°C	I - II - III - IV	MAX.	1.5				V
V_{GD}	$V_D = V_{DRM}$ R_L = 3.3kΩ	Tj =110°C	I - II - III - IV	MIN.	0.2				V
tgt	$V_D = V_{DRM}$ I_G = 40mA dI_G/dt = 0.5A/µs	Tj = 25°C	I - II - III - IV	TYP.	2				µs
I_L	$I_G = 1.2I_{GT}$	Tj = 25°C	I - III - IV	TYP.	10	10	20	20	mA
			II		20	20	40	40	
I_H*	I_T = 100mA Gate open	Tj = 25°C		MAX.	15	15	25	25	mA
V_{TM} *	I_{TM} = 5.5A tp = 380µs	Tj = 25°C		MAX.	1.65				V
I_{DRM} I_{RRM}	V_{DRM} rated V_{RRM} rated	Tj = 25°C		MAX.	0.01				mA
		Tj = 110°C		MAX.	0.75				
dV/dt *	Linear slope up to V_D = 67% V_{DRM} gate open	Tj = 110°C		TYP.	10	10	-	-	V/µs
				MIN.	-	-	10	10	
(dI/dt)c*	(dI/dt)c = 1.8A/ms	Tj = 110°C		TYP.	1	1	5	5	V/µs

* For either polarity of electrode A_2 voltage with reference to electrode A_1

PRODUCT INFORMATION

Package	$I_{T(RMS)}$	V_{DRM} / V_{RRM}	Sensitivity Specification			
	A	V	T	D	S	A
BTA (Insulated)	4	400	X			X
		600	X	X		
		700	X		X	
BTB (Uninsulated)		400	X	X		
		600	X		X	

ORDERING INFORMATION

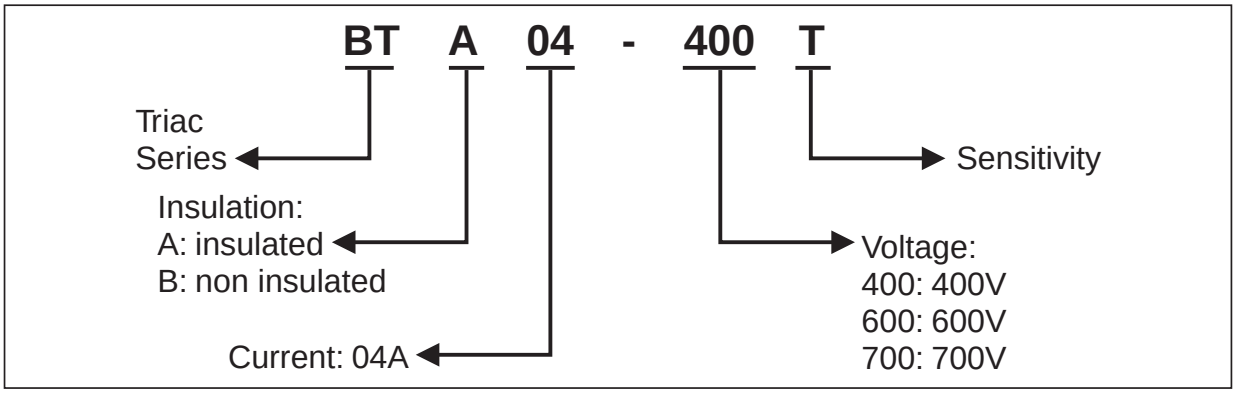

Fig. 1: Maximum RMS power dissipation versus RMS on-state current (F = 50Hz).(Curves are cut off by (dI/dt)c limitation)

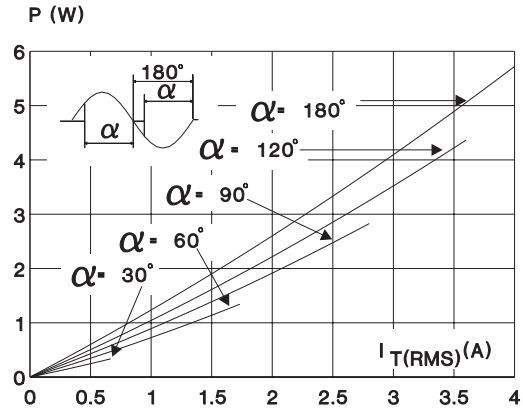

Fig. 2: Correlation between maximum RMS power dissipation and maximum allowable temperature (Tamb and Tcase) for different thermal resistances heatsink + contact (BTA).

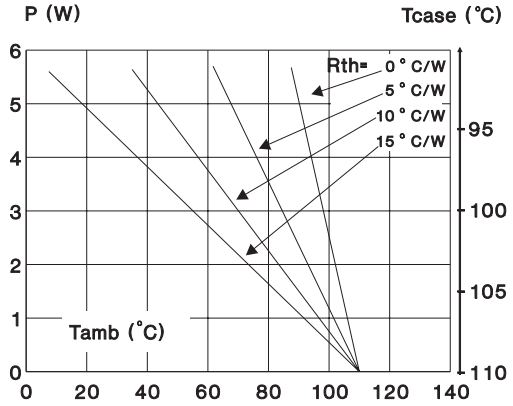

Fig. 3: Correlation between maximum RMS power dissipation and maximum allowable temperature (Tamb and Tcase) for different thermal resistances heatsink + contact (BTB).

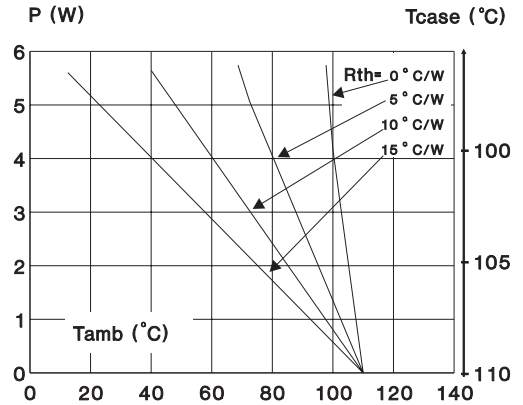

Fig. 4: RMS on-state current versus case temperature.

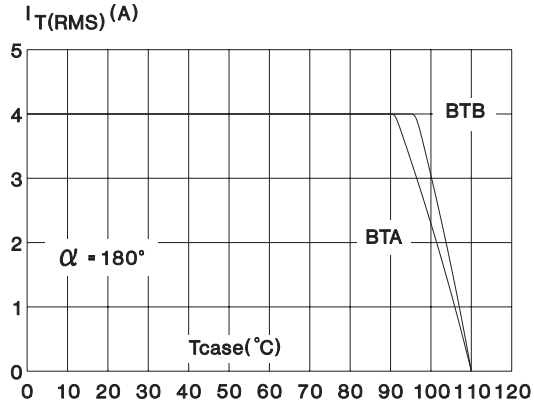

Fig. 5: Relative variation of thermal impedance versus pulse duration.

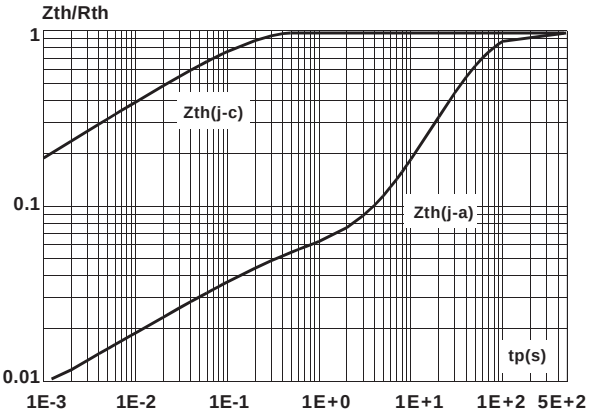

Fig. 6: Relative variation of gate trigger current and holding current versus junction temperature.

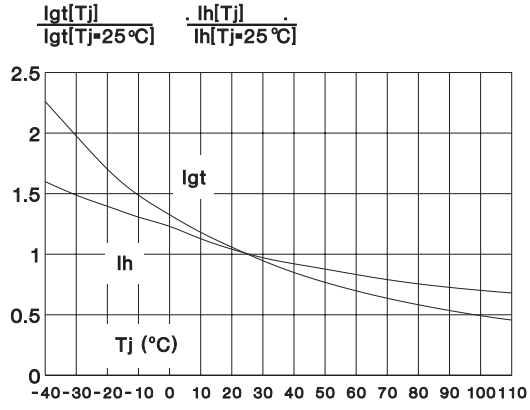

Fig. 7: Non repetitive surge peak on-state current versus number of cycles.

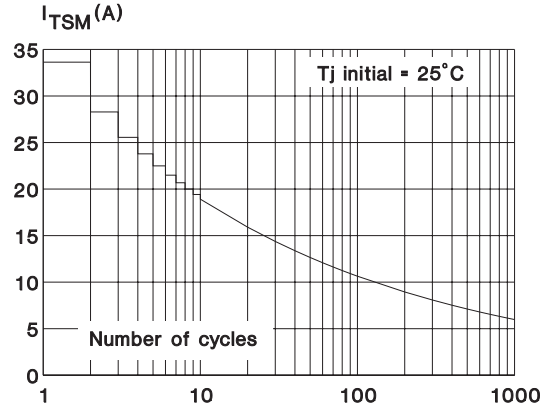

Fig. 8: Non repetitive surge peak on-state current for a sinusoidal pulse with width: $t \leq 10ms$, and corresponding value of I^2t.

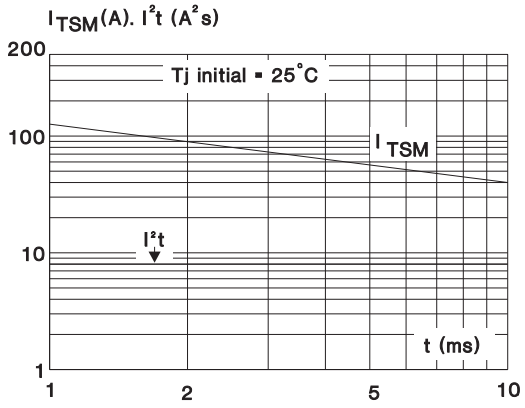

Fig. 9: On-state characteristics (maximum values).

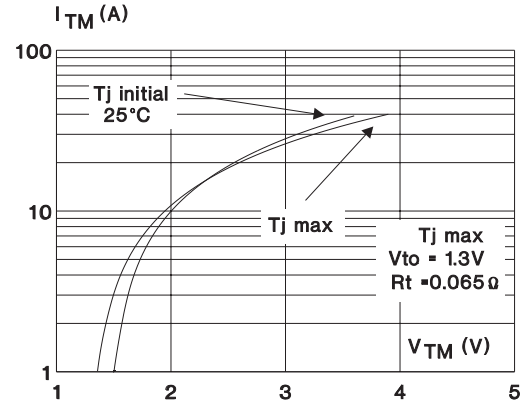

PACKAGE MECHANICAL DATA

TO-220AB (Plastic)

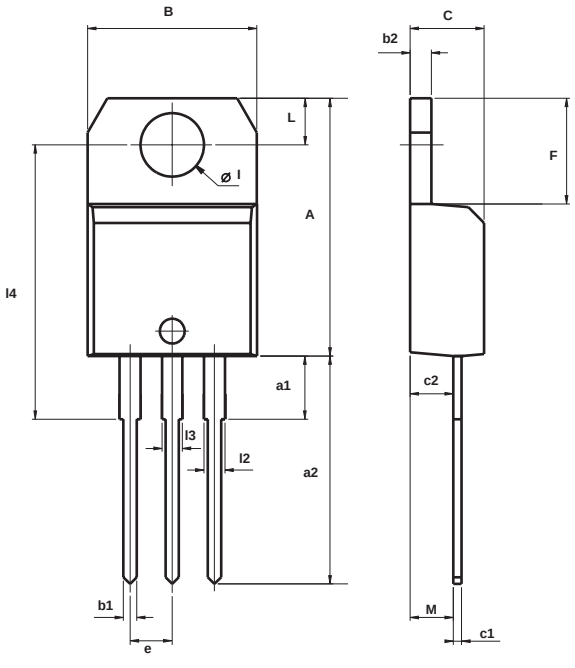

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.20		15.90	0.598		0.625
a1		3.75			0.147	
a2	13.00		14.00	0.511		0.551
B	10.00		10.40	0.393		0.409
b1	0.61		0.88	0.024		0.034
b2	1.23		1.32	0.048		0.051
C	4.40		4.60	0.173		0.181
c1	0.49		0.70	0.019		0.027
c2	2.40		2.72	0.094		0.107
e	2.40		2.70	0.094		0.106
F	6.20		6.60	0.244		0.259
I	3.75		3.85	0.147		0.151
I4	15.80	16.40	16.80	0.622	0.646	0.661
L	2.65		2.95	0.104		0.116
I2	1.14		1.70	0.044		0.066
I3	1.14		1.70	0.044		0.066
M		2.60			0.102	

OTHER INFORMATION

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
BTA/BTB04-xxxy	BTA/BTB04-xxxy	TO-220AB	2.3 g	250	Bulk

- Epoxy meets UL94,V0
- Cooling method: C
- Recommended torque value: 0.8 m.N.
- Maximum torque value: 1 m.N.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.
STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES
Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

http://www.st.com